


# NiT-VU


High-Performance Micro Guidewire

## Have Visibility. Have Control.

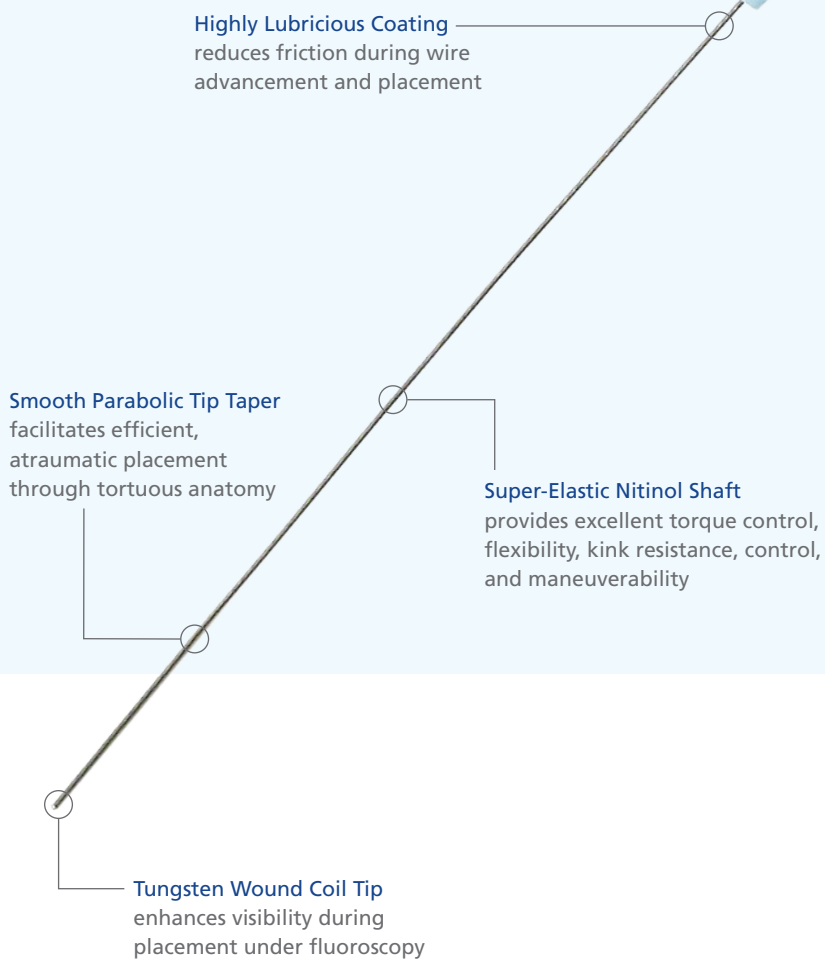


## Inner Core Tip Profile


### > AngioDynamics' Parabolic Grind

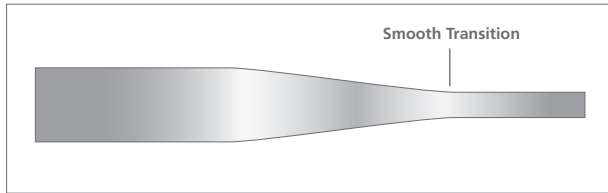

### > Competitor's Linear Grind

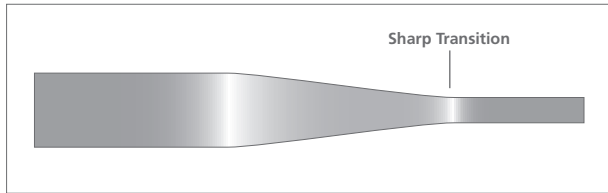

## Generated Friction Comparison<sup>†</sup> vs Leading Competitor

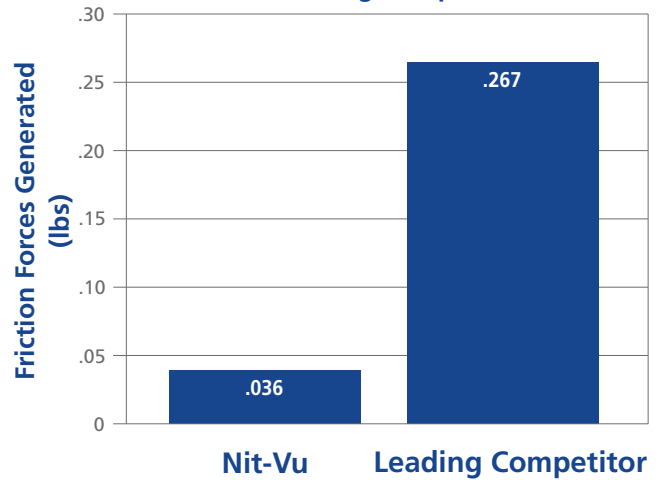

Catalog #	Diameter (inches)	Guidewire Length (cm)	Tip Stiffness	Tip Length (cm)	Tip Shape
<input type="checkbox"/> H787058001205	0.014	180	Stiff	2	Straight
<input type="checkbox"/> H787058001225	0.014	300	Stiff	2	Angled
<input type="checkbox"/> H787058001195	0.014	80	Standard	5	Angled
<input type="checkbox"/> H787058001045	0.014	80	Standard	5	Straight
<input type="checkbox"/> H787058001215	0.014	180	Standard	5	Angled
<input type="checkbox"/> H787058001055	0.014	180	Standard	5	Straight
<input type="checkbox"/> H787058001235	0.014	300	Standard	5	Angled
<input type="checkbox"/> H787058001065	0.014	300	Standard	5	Straight
<input type="checkbox"/> H787058001025	0.014	180	Intermediate	7	Angled
<input type="checkbox"/> H787058001035	0.014	300	Intermediate	7	Angled

Torque device included on all wires. Guidewires are packaged three per box.

Catalog #	Diameter (inches)	Guidewire Length (cm)	Tip Stiffness	Tip Length (cm)	Tip Shape
<input type="checkbox"/> H787058001255	0.018	80	Stiff	2	Angled
<input type="checkbox"/> H787058001245	0.018	80	Stiff	2	Straight
<input type="checkbox"/> H787058001285	0.018	180	Stiff	2	Angled
<input type="checkbox"/> H787058001135	0.018	80	Standard	5	Angled
<input type="checkbox"/> H787058001145	0.018	80	Standard	5	Straight
<input type="checkbox"/> H787058001265	0.018	110	Standard	5	Straight
<input type="checkbox"/> H787058001295	0.018	180	Standard	5	Angled
<input type="checkbox"/> H787058001155	0.018	180	Standard	5	Straight
<input type="checkbox"/> H787058001315	0.018	300	Standard	5	Angled
<input type="checkbox"/> H787058001165	0.018	300	Standard	5	Straight
<input type="checkbox"/> H787058001075	0.018	80	Intermediate	7	Angled
<input type="checkbox"/> H787058001085	0.018	80	Intermediate	7	Straight
<input type="checkbox"/> H787058001095	0.018	110	Intermediate	7	Straight
<input type="checkbox"/> H787058001115	0.018	180	Intermediate	7	Angled
<input type="checkbox"/> H787058001105	0.018	180	Intermediate	7	Straight
<input type="checkbox"/> H787058001125	0.018	300	Intermediate	7	Angled
<input type="checkbox"/> H787058001305	0.018	300	Stiff	2	Straight

PHYSICIAN'S SIGNATURE

<sup>†</sup>Data on file

Consult your local AngioDynamics representative for specific country availability.

### IMPORTANT RISK INFORMATION

**INDICATION FOR USE:** The Nit-Vu<sup>®</sup> High-Performance Micro Guidewire is designed to facilitate the placement of devices for diagnostic and interventional procedures.

**CAUTION:** Federal (USA) law restricts these devices to sale by or on the order of a physician.

For single use only.

**CONTRAINDICATIONS:** These guidewires are not intended for PTCA use.

**WARNINGS AND PRECAUTIONS:** This device is not intended for use in the coronary arteries or the neurovasculature. Reuse of single-use devices creates a potential risk of patient or user infections. Contamination of the device may lead to injury,

illness or death of the patient. Reprocessing may compromise the integrity of the device and lead to device failure.

Please see package insert for complete list of warnings and cautions.

Distributed by:



USA > 14 Plaza Drive, Latham, NY 12110 > tel: 800-772-6446 or 518-798-1215 > fax: 518-798-1360  
International > Haaksbergweg 75 (Margrietoren), 1101 BR, Amsterdam Z-O > The Netherlands  
tel: +31 (0)20 753 2949 > fax: +31 (0)20 753 2939

[www.angiodynamics.com](http://www.angiodynamics.com)

\*AngioDynamics, the AngioDynamics logo and Nit-Vu are trademarks and/or registered trademarks of AngioDynamics, Inc., an affiliate or a subsidiary. Distributed by AngioDynamics, Inc. © 2016 AngioDynamics, Inc. All rights reserved. ANGB 122 GL Rev 01 02/16